

Motore/Engine

| | |
|-------------------|---------------|
| BRAND | YANMAR |
| Type | 4TNV98 |
| Power | 24 kW - 33 CV |
| Cyl. | 4 L |
| Capacity | 3319 |
| Cooling | Liquid |
| Rpm | 1500 |
| SAE | 4 - 7"½ |
| Air intake | TurboCharged |

Alternatore/Alternator

| | |
|---------------------|---------------------|
| BRAND | MECC-ALTE |
| Type | ATEB 28/4 L2 |
| Poles - Rpm | 4 Poles - 1500 Rpm |
| PRP Cont. | 30 kVA |
| PRP Cont. | 24 kW |
| LTP Stand-by | 33 kVA |
| LTP Stand-by | 26,4 kW |
| Frequency | 50 Hz |
| Tension | 400 V |

Pompa/Pump

| | |
|-------------------|--------------------|
| BRAND | VARISCO |
| Type | EU 6-250 |
| Engine | Three-phase |
| Power | 11 kW - 15 CV |
| Rpm | 1450 - 4 Poles |
| Solids | 76 mm |
| ∅ in - out | 150 mm |
| Socket | 4/80A |
| Weight | 280 kg |

Compressore/Compressor

| | |
|--------------------|--------------|
| BRAND | NUAIR |
| Capacity | 6 lt |
| Pressur Max | 8 bar |

Immagini/Pictures



Prestazioni/Performance

| Performance | 1450 Rpm | | |
|-------------|----------|------|------|
| mc/h | 80 | 200 | 300 |
| l/min | 1350 | 3330 | 5000 |
| mt | 15 | 11 | 5 |

INVERTER

| | |
|--------------|-------------------------|
| BRAND | SANTERNO |
| Type | SINUS PENTA 0017 |
| Power | 11 kW |

Torre Faro/Tower Light

| | |
|-----------------|-----------------|
| BRAND | Fireco |
| Type | STANDARD |
| H max | 6005 mm |
| H closed | 2005 mm |
| Ø Column | Ø115 mm |
| Rotation | 360° |

Quadro Elettrico/Electrical Panel

| | |
|------------------|---------------------------|
| Socket 1° | 32 A - Threephase |
| Socket 2° | 16 A - Monophase |
| Socket 3° | Schuko - MonoPhase (opt.) |
| INVERTER: | Multi pole socket |

Serabatoio/Tank

| | | |
|-------------|--------|---|
| Tank | 50 lt. | x |
| | 100 lt | x |
| | 250 lt | x |

Carrello/Trolley

| | |
|---------------------|--------------------------|
| Type | 2 axes - 4 Wheels |
| Chassy | Acciaio zincato |
| Loading area | Wood - Legno |
| Feet - Piedi | 2 - Stabilitation |
| Kg max | 2500 kg |

Fari/Lights

| | |
|-----------------|----------------------|
| Model | ALOGEN |
| Type | 6 x 1000 Watt |
| Lumen | 132.000 |
| On/Off | 2 + 2 |
| Rotation | 180° - 360° |
| Weight | 18 kg |

Centralina/Control unit

| | |
|--------------|----------------|
| BRAND | ELCOS |
| Type | CAM 120 |

Picture




Dimension - Weight

| | | |
|--|---------------|---------|
| | L: | 1200 mm |
| | H: | 500 mm |
| | W: | 1800 mm |
| | kg: | 2000 |
| | Truck: | 3,0 ml |



Collaudo a norma UNI EN ISO 9906 – livello 2
 Liquido di prova: acqua, densità 1000 kg/m³
 Passaggio solidi sferici: D.76 mm
 Tempo di innescamento: 27 s (da 1.5 m)
 Diametro girante: 247 mm
 Numero di pale: 2
 Potenza elettrica installata: 11 kW – 50 Hz

Test according to UNI EN ISO 9906 – 2nd level
 Test liquid: water, density 1000 kg/m³
 Spherical solids handling: D.76 mm
 Priming time: 27 s (with a suction lift of 1.5 m)
 Impeller diameter: 247 mm
 Number of vanes: 2
 Installed power: 11 kW – 50 Hz

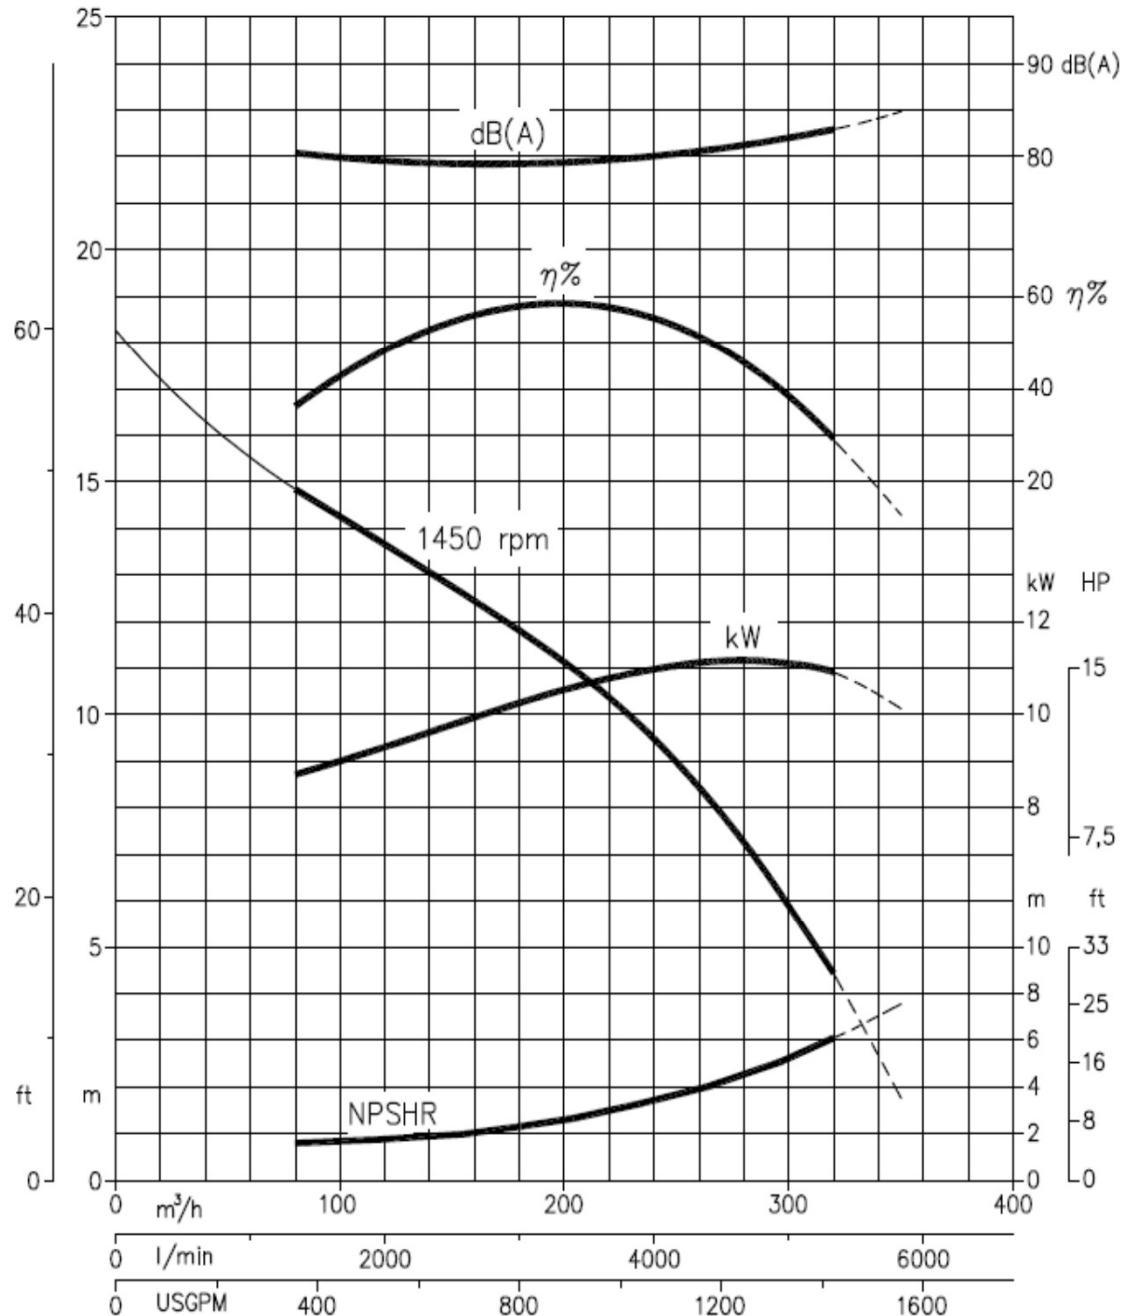

dB(A)=max livello sonoro ad 1 m / dB(A)=max noise level at 1 m